

Methodology based on MCDM for risk management in EPC projects:

A Case Study of LPG Storage Tanks Construction

Mohammadreza Badalpur¹, Ashkan Hafezalkotob^{2*}

^{1,2}Industrial Engineering College, Islamic Azad University, South Tehran Branch, Tehran, Iran.

Mrbp@osanat.com, a_hafez@azad.ac.ir

Abstract

The most important aim of every project is on time completion, budget consideration and reaching the highest possible quality, based on contract. This paper suggests a methodology for risk management in engineering, procurement, and construction (EPC) projects. Risk management enables project teams to perform with minimum deviation from predetermined goals. The proposed methodology identifies and evaluates critical risks of EPC projects using multi criteria decision making (MCDM) techniques. Then, by the means of developed earned value management (EVM) technique and considering Project Risk index (PRI), this work will proceed to estimate the degree of risk effects on project objectives. The optimal control measures (CMs) to address the risks are found through a goal programming model. The methodology was implemented on a case study in oil and gas industry in Iran. Results of this study show the impact of critical risks on objectives of EPC projects.

KEYWORDS: Risk management in EPC projects; Critical risks; MCDM techniques; EVM method; Linear Programming; Control Measures.

*Corresponding author.

1- Introduction and Literature Review

Currently, EPC projects have become one of the most popular methods of project execution for owners and contractors in different industries such as commercial, energy and other industrial projects. Preference of the owners and their tendency to conclude a contract with contractors as a lump sum or fixed price contract increases the risk for contractors, which shows the importance of risk and risk management (RM). Thus, the goal of each organization is to complete her/his project on time and at the lowest possible cost to achieve more profit, based on design specifications. Therefore, in addition to time scheduling, budgeting and resource planning, a decision-maker (DM)/project manager must identify the critical risks and adopt a suitable decision accordingly.

There are some studies that propose different decision making models for RM problems. Sadaba et al. (2014) suggested a project management methodology for small businesses (SMEs) based on an extensive research with a large number of Spanish companies. They considered factors usually neglected by SMEs. The methodology based on project RM includes simple tools, templates and risk checklists with recommended actions and indicators. Zhang and Fan (2014) proposed an optimization method for selecting project risk response strategies in project RM. Their method is based on a resolution process and an integer programming model which integrates three critical elements namely cost, schedule and quality. The most desirable risk response strategies to cope with the risk events are obtained by solving their proposed model. Gang Hwang et al. (2014) investigated RM in small projects in terms of status, barriers and impact of RM on project performance. The results of the research reported a positive correlation between RM implementation and improvement in quality, cost and schedule performance of small projects. Rezaie et al. (2007) considered the relationship of major uncertainties of a project by using extended Monte Carlo simulation method for the improvement of RM. Tsaur (2011) proposed a new normalized method and risk attitude for analyzing technique of order performance by similarity to ideal solution (TOPSIS) with interval data. The results indicate considerable decisions for different decision makers with different risk attitudes. Changsoon Park et al. (2014) developed a method of risk measurement based on the expected utility and reference, prior to risk measuring. They proposed an expected utility and uncertainty decision making model under risk.

Some literature has recently emerged which developed some methodologies of RM. Peixoto et al. (2014) proposed a developed RM methodology for a pilot project in a Portuguese electric energy organization. Yanting and Liyun (2011) presented a number of specific recommendations and measures with actual situations of the RM of petroleum operations. Teymouri and Ashoori (2011) investigated the effects of IT on project RM, necessary for any industrial and business activity as a continuous process. They estimated the effects of using IT on 50 Iranian oil companies by analyzing the data provided through questionnaires. Saporì et al. (2014) proposed implementation of risk-based methodologies by process engineers to achieve a quantitative assessment of security management systems. They indicate how to analyze the system and how to integrate technological, human and procedural aspects by the flow charts. Then they describe how to manage threats, vulnerability and criticality of critical infrastructure subsystems; how to identify primary causes and top event consequences drawing fault trees and event trees; and finally how to calculate residual risk for security management systems. Rodrigues and Crispim (2014) proposed a theoretical framework to classify and associate those practices to each phase of the project life cycle and to each project RM process with the purpose of providing some guidelines for selection of the best practices with regard to the organizational maturity and project complexity. Taylan et al. (2014) suggested novel analytic tools to evaluate the construction projects and their overall risks under incomplete and uncertain situations. Moore (2013) examined the key elements of ANSI/API (American National Standards Institute/American Petroleum Institute 780) Security Risk Assessment process and discussed how leading organizations may use risk-based performance metrics to systematically analyze the status of security facilities. He could finally identify appropriately scaled and fiscally responsible

counter measures based on current and projected threats. Mohebi and Bislimi (2012) described “risk” as a potential deviation from predefined goals and studied the overall parameters affecting projects’ risks and analyzed different methodologies of the project RM. They develop a customized methodology applicable for Engineering, Procurement and Construction projects in oil and gas industries. Murphy et al. (2011) presented a methodology for extracting innovation constraints from building projects through stakeholders management competencies, failure mode and effect analysis (FMEA).

Oztas and okmen (2004) presented a literature survey on the issues of risk, RM, analysis and the design–build contract system, to propose a schedule and cost risk analysis model, and to address applicability of these models in scheduling and cost estimation of a fixed-price in design–build construction project. Liu and Pheng low (2009) suggested a conceptual framework to establish linking organizational learning with RM, focusing on the organizational behavior in Chinese construction firms. Mahamid (2011) identified the risk matrix for factors causing time delay in road construction projects. In total, 43 factors that might cause delay in road construction projects were defined through a detailed literature review and tabulated in a questionnaire form and analyzed in terms of impact and probability of occurrence. Adedokun et al. (2011) evaluated adoption of qualitative risk analysis techniques (QRAT) on construction projects in Nigeria with the aim of providing a better understanding on the state of these techniques through a questionnaire survey and an in-depth interview of required data for the study. Thus all the studies aim to employ appropriate tools and techniques to identify kind of risks that can affect the project objectives.

The rest of this paper is structured as follows. A brief introduction of RM and project risks is presented in Section 2. Section 3 explains application of the risk analysis in RM processes. In Section 4 a graphical framework of the methodology is provided to contribute the project team entering the RM processes. Afterwards, the tools for implementing the proposed methodology will be explained step by step. In Section 5 the results of the proposed methodology are reported with a case study. Section 6 presents the main conclusions and directions for future research.

2- Risk Management and Project Risk

“Risk management” has been widely applied in various fields such as economics, insurance, and many other industries. RM is a structured process for managing uncertainty through risk assessment (Costa et al., 2009). “Project risk” is an uncertain event or condition that, upon occurrence, has an effect on, at least, some project objectives (scope, schedule, cost and quality) (PMBOK, 2013). Therefore, “project Risk Management” is composed of a systematic process by which the risk elements or conditions may be identified, evaluated and avoided, mitigated or eliminated to preserve achievement of the project goals regarding cost, schedule, and quality (Kris and Nilson, 2006).

3- Risk Analysis

Risk analysis is performed after risk identification. In fact, risk analysis techniques are to show what happens if the project does not proceed according to plan due to potential risks and warns the decision-maker or the project manager about necessary measures to cope with the risks, which can be either qualitative or quantitative (Oztas and Okmen, 2004). In other words, risk analysis is the key in identifying, addressing, and handling risks before they become threats to success (Guo, 2004). Car and Tah (2001) employed a fuzzy approach to construction risk assessment and analysis. They present a hierarchical risk breakdown structure (RBS) for representing a formal model for qualitative risk assessment. Chan et al.

(2010) developed a fuzzy risk assessment model for construction projects, procured with target cost contracts (TCC) and guaranteed maximum price (GMP) contracts. Du and Li (2008) proposed a comprehensive approach to valuation of an infrastructure concession right and quantitative RM projects in the People's Republic of China. Ghezavati et al. (2013) employed a systematic method of linear programming model to select the best strategies for responding to project risk. Odeyinka et al. (2012) developed regression models to assess the impact of identified risks on baseline forecast at the in-progress stage of a construction project.

Based on research performed in the context of RM, a comprehensive methodology is still needed in EPC projects in order to estimate the risk effects on the project objectives (time, cost, quality). This paper attempts to identify and analyze the risks and effects on the objectives of EPC projects by studying the problems occurred in a real EPC projects, using project management tools and techniques which are well known by the managers.

4- Research Methodology

Fig. 1 shows the research methodology proposed for this study through the following steps:

1. Definition and prioritization of risk through in-depth interviews with experts and preparing questionnaires and use of fuzzy DEMATEL technique and thereby identifying the critical risks.
2. Quantitative risk analysis done for critical risks using risk quantity index (RQI), PRI and developed EVM. The rest of the work is as follows: defining CMS proportional to the risks, along with the cost required to implement them for response to risk. Meanwhile the impact of each Control Measure (CM) on project objectives in reducing risk loss should be specified. This is done by Analytical Hierarchy Process (AHP) technique with experts' ideas taking into account project objectives and priorities (time, cost and quality). Thereby EVM indices and RQI quantity will be recalculated with regard to the CMS.
3. Risk control stage in which the optimal CMS will be specified using linear programming model and predefined goals.
4. Risk monitoring will be carried out through implementation of CMS during the course of the project, calculating the project performance and repeating of all steps during reporting of the project.

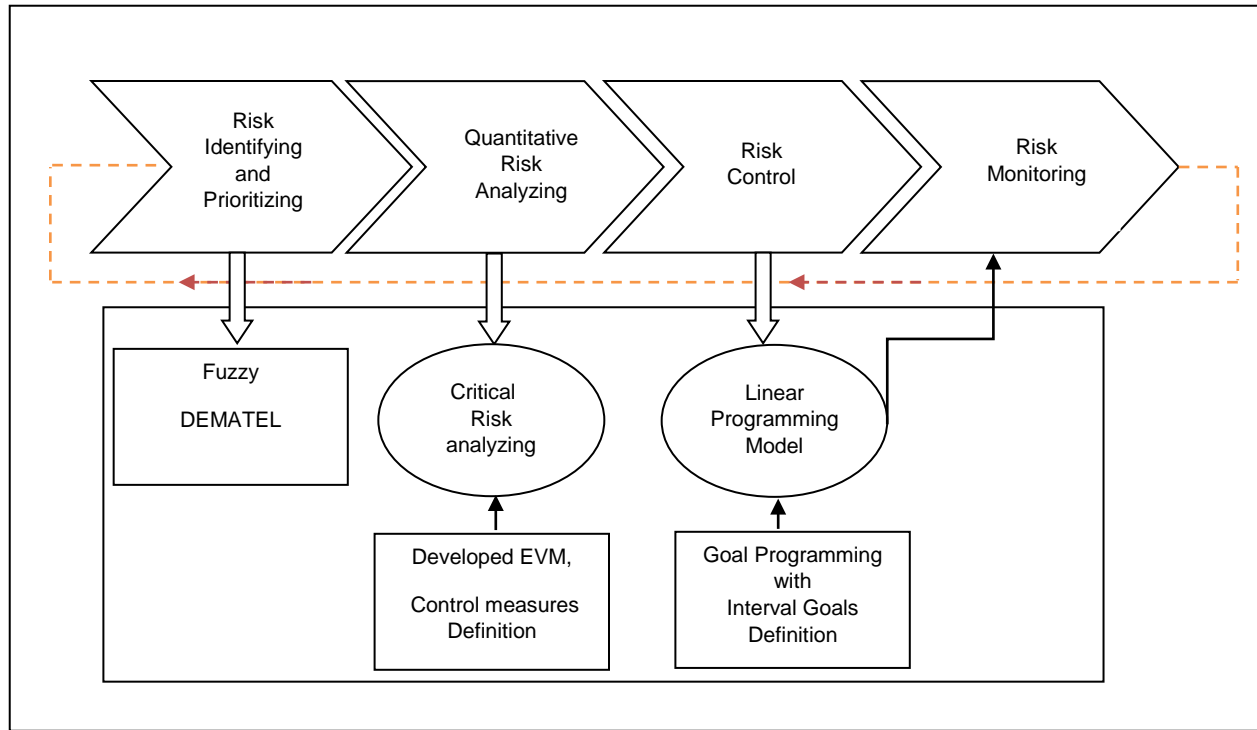


Fig. 1. The framework of RM methodology

4-1- Fuzzy Set Theory and triangular Fuzzy Numbers

Fuzzy set theory (FST) is based on the context of membership function and taking linguistic variables into account. As stated by (Zadeh, 1965) FST is an approach to convert the qualitative variables into quantitative variables by means of linguistic variables. Values of linguistic variables are defined in accordance with human expression and statement. It is notable that the theory considers uncertain data in an uncertain environment based on people's thoughts and ideas. The linguistic terms can be represented through different fuzzy-shaped numbers. The triangular and trapezoidal fuzzy numbers are often used as fuzzy linguistic variables. In this study, the triangular fuzzy numbers are employed as a triplet number (l, m, u) and shown in Fig. 2. The membership function is shown in Eq. (1).

$$\mu_{\tilde{A}}(x) = \begin{cases} 0, & x < l \\ \frac{(x-l)}{m-l}, & l \leq x \leq m \\ \frac{(u-x)}{u-m}, & m \leq x \leq u \\ 0, & x > u \end{cases} \quad (1)$$

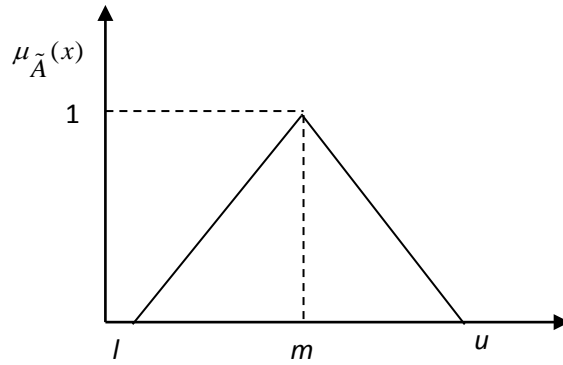


Fig. 2.A triangular Fuzzy Number

The pair-wise comparisons between any two determinants can be expressed by integer scores ranging from 0 to 4 and representing no influence (0), very low influence (1), low influence (2), high influence (3) and very high influence (4) respectively. These crisp scores are translated as fuzzy numbers based on Fig. 3 and Table.1.

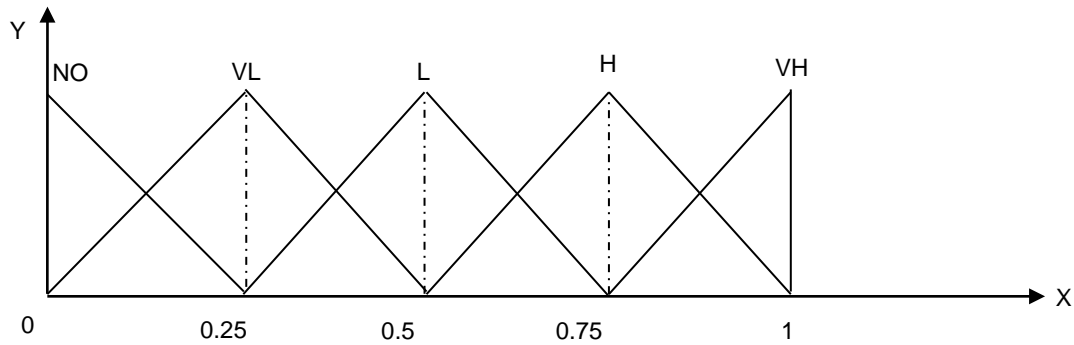


Fig.3.A fuzzy membership including triangular Fuzzy Numbers

Table 1. The assigned fuzzy numbers to each linguistic term of **Fig.3.**

Linguistic term	fuzzy triangular number
No influence	[0,0,0.25]
Very low influence	[0,0.25,0.5]
Low influence	[0.25,0.5,0.75]
High influence	[0.5,0.75,1]
Very high influence	[0.75,1,1]

In many projects especially in EPC projects, risk factors come from various areas of political, economic, social, technological and geographical environments. Since the nature of risk incorporates a situation of vagueness, the fuzzy set theory seems to be a suitable method for this situation.

4-2- DEMATEL and Fuzzy DEMATEL Methods

Decision Making Trial and Evaluation Laboratory (DEMATEL), is a decision making method based on a pair-wise comparison that was presented by Fontela & Gabus between 1972 and 1976. This technique was presented for solving complicated problems (Fontela and Gabus, 1974). DEMATEL was developed with the belief that pioneering and appropriate use of scientific research methods could improve understanding of the specific obstructive, intertwined problems, and also contribute to identification of workable solutions by a hierarchical structure (Tzeng and Huang, 2011). The fuzzy DEMATEL method has been successfully applied in many fields. For the first time in the construction of risk assessment, Samani (2012) successfully applied crisp DEMATEL as a tool for risk assessment in Iranian oil and gas projects and produced logical results. Recently, the Fuzzy DEMATEL method was found to be a better approach for real problems. The DEMATEL method, whether crisp or fuzzy, is a better service for larger projects than smaller ones due to the fact that risks raised from various areas and levels in the larger projects have more inter-relationships, and DEMATEL has the ability to take that into account. Since phases of EPC project are highly inter-dependent, one should take a proper technique that is able to show this dependency. An advantage of the DEMATEL method is that it not only identifies the critical determinants, but also has the capacity of revealing the relationships between determinants, thereby providing more valuable information for deciding on a problem with complex interdependencies. The structure model of DEMATEL and fuzzy DEMATEL method are as follows (Tzeng and Huang, 2011).

4-2-1- DEMATEL

1. Definition of pair-wise comparison fuzzy numbers such that of Table 1.
2. Constituting that the initial direct-relation matrix z is a $n*n$ matrix obtained by pair-wise comparisons in terms of influences and directions between criteria, in which z_{ij} is denoted as the degree to which criterion i affects criterion j .
3. Constituting the normalized direct-relation matrix X which can be obtained through Eq. (2) in which all principal diagonal elements are equal to zero.

$$X = S.Z \quad (2)$$

$$S = \frac{1}{\text{MAX}_{1 \leq i \leq n} \sum_{j=1}^n z_{ij}} \quad (3)$$

$$S = \min \left\{ \text{MAX}_{1 \leq i \leq n} \sum_{j=1}^n z_{ij}, \text{MAX}_{1 \leq j \leq n} \sum_{i=1}^n z_{ij} \right\} \quad (4)$$

4. Constituting the total relation-matrix T can be acquired by employing Eq. (5) in which I is denoted as the identity matrix.

$$T = X (I - X)^{-1} \quad (5)$$

5. The sum of rows and columns are separately denoted as vector d and vector r within the total-relation matrix T through the following formula.

$$T = (t_{ij})_{n \times n} \quad (6)$$

$$d = (d_1, \dots, d_n), \text{ where } (d_i = \sum_{j=1}^n t_{ij}) \quad (7)$$

$$r = (r_1, \dots, r_n), \text{ where } (r_j = \sum_{i=1}^n t_{ij}) \quad (8)$$

6. A casual diagram can be obtained by mapping dataset of $(d_i + r_i, d_i - r_i)$, where the horizontal axis is $d_i + r_i$ and the vertical axis is $d_i - r_i$.

4-2-2- Fuzzy DEMATEL

All steps in Fuzzy DEMATEL are similar to crisp DEMATEL with this difference that a triangular fuzzy number such as $\tilde{Z} = (\tilde{I}_{ij}, \tilde{m}_{ij}, \tilde{u}_{ij})$ is defined and P experts make sets of pair-wise comparisons matrix.

Acquiring and aggregating the assessments of decision makers with number of P experts make sets of pair-wise comparisons matrix $(\tilde{Z}^1, \tilde{Z}^2, \dots, \tilde{Z}^P)$ in terms of influences and directions between the criteria. For aggregating the results of these assessments, Eq. (9) which is based on representation of an additional operation can be utilized (see Eqs. (2) - (4)). Eq. (10) can be used for de-fuzzification. The initial direct-relation matrix $\tilde{Z} = [\tilde{z}_{ij}]_{n \times n}$ can be obtained later, in which z_{ij} is denoted as the degree to which criterion i affects criterion j .

$$Z = \left[\frac{1}{P} (\tilde{Z}^1 \oplus \tilde{Z}^2 \oplus \dots \oplus \tilde{Z}^P) \right]_{n \times n} \quad (9)$$

Where,

$$(\tilde{Z}^1 \oplus \tilde{Z}^2 \oplus \dots \oplus \tilde{Z}^P) = \left[\frac{1}{6} (l_{ij}^1 + 4m_{ij}^1 + u_{ij}^1 + \dots + l_{ij}^P + 4m_{ij}^P + u_{ij}^P) \right]_{n \times n} \quad (10)$$

4-3- Combination Earned Value Management and Risk

Recently, with development of scientific methods and with regard to complexity of large-scale projects, the necessity of applying some techniques to aid the project managers was properly sensed. The earned value is a leading technique for monitoring and analyzing project performance and project progress (Aliverdi et al., 2013). EVM is a project management technique that measures project progress in an objective manner, and provides an early warning of the performance issues, if any (PMI, 2004). EVM measures the project performance and progress by an integrated management of three most important elements in a project, namely cost, schedule and scope. Although it allows exact measurement of the project progress, it can reflect unreal deviations of project aims with traditional indices. A developed earned value technique is followed here which can show the most real deviations of the plan and contribute to management in order to make better decisions for achieving project goals. The models adopted for estimation based on literature (Alam Tabriz et al. (2013), Vendevoorde and Vanhouke (2006), Badiru and Omitaomu (2011)) are as follows:

Table 2. Definition of EVM indices

Item	Indices	Description
1	AC	Actual cost = Total cost actually incurred so far.
2	BAC	Budget at completion = Baseline cost to project completion
3	EV	Earned value of the project = Amount of budget earned so far based on physical work accomplished
4	CPI	Cost performance index = Cost efficiency ratio. A CPI of 1.00 means that the costs are exactly the same as the budget for work actually done so far.
5	$SPI_{(t)}$	Schedule performance index = The schedule efficiency ratio. An SPI of 1.00 means that the project is exactly on schedule.
6	PRI	Project Risk Index Based on formula $F = P(1+i)^n$, variable i is interest rate per period, variable n is number of interest period, variable P is a present sum of money, variable F is a future sum of money, variable n tabernacle with delay occurred in the project and also variable P tabernacle with $(BAC - EV_{FT})$, there is the budget quantity of the project to need after finishing of the project finish time (Finish Time(FT)=it can be contractual time or rescheduled finish date agreed between contractor and owner)
7	$(BAC - EV_{FT}) * (1+i)^{Delay}$	
8	EAC	Estimate at completion = Expected total cost based on average cost and schedule efficiencies ratio
9	PD	Planned duration to complete
10	EAC_t	Estimate at completion=Expected total time to complete
11	RQI_i	Risk quantity index
12	$n * r$	N = number of risks, r =maximum quantity of the value risks
13	$P_i * I_i$	P is occurrence probability, I is Risk impact

The equation (7) has been proposed in this paper.

$$RQI_i = P_i * I_i \quad (11)$$

$$PRI = 1 + \left(\frac{(-RQI_i)}{n * r} \right) \quad (12)$$

$$EAC_t = \frac{PD}{SPI(t) * PRI} \quad (13)$$

$$EAC = AC + \frac{(BAC - EV)}{\left(\frac{CPI + SPI(t)}{2} \right) * PRI} + (BAC - EV_{FT}) * (1+i)^{Delay} \quad (14)$$

First, by using Eq. (11), the experts will proceed to estimate RQI quantity which is equal to occurrence probability multiplied by the impact of each risk on objectives. Then PRI is calculated based on Eq. (12) and finally using Eqs. (13) and (14), the finishing time and budget of the project is calculated at project completion.

4-4- Goal Programming

Goal programming is one of the most important and significant methods in solving the multi-objective problems which was first used by (Charnes et al., 1995). General form of goal programming is as follows. Based on the model, p_k is k^{th} priority of the goals, w_{ik} is the weight of the deviation variables of the goals, x_j is the decision variable, d_i^-, d_i^+ are the deviation variables, b_i is the right hand side parameter, a_{ij} is technical variable, c_{ij} is factors of i^{th} variable in j^{th} goal.

$$Min Z = \sum_{k=1}^q \sum_{i=1}^m p_k (w_{ik}^- d_i^- + w_{ik}^+ d_i^+) \quad (15)$$

$$St : \sum_{j=1}^n C_{ij} X_j + d_i^- + d_i^+ = b_i \quad (i = 1, 2, \dots, m) \quad (16)$$

$$\sum_{j=1}^n a_{rj} X_j \leq b_r \quad (r = 1, 2, \dots, s) \quad (17)$$

$$X_j, d_i^-, d_i^+ \geq 0 \quad (j = 1, \dots, n) \quad (18)$$

Now, based on the general form of goal programming model, we propose our described model. In the proposed model, λ_i, μ_i are weights of deviation variables, $d_i^-, d_i^+, e_i^+, e_i^-$ are deviation variables, RQI_i, RQI_{ij} are risk quantity index of risk i if occurred, and risk quantity index of risk i by employing CM j , respectively. Variable S_{ij} is the decision variable that if risk i is controlled by CM j , it will take 1, otherwise it takes 0. C_{ij}, C'_{ij} denote cost control before and after risk happened, respectively which is rapidly controlled. L_i, L'_{ij} are the lost costs if the risk i happens and after employing CM j , respectively. $\square t_i, \square t'_{ij}$ represent the increasing time of the project, after risk i happened and time increasing of the

project by employing of CM j , respectively. The goal levels for total risk quantity, total budget for CM, lost cost of risk, and planned schedule of the project are indicated by RQ^{goal} , C^{goal} , L^{goal} and T^{goal} , respectively. The goal programming model for RM is as follows:

$$Min Z = \sum_{k=1}^4 \lambda_k (d_k^- + d_k^+) + \sum_{k=1}^4 \mu_k (e_k^- + e_k^+) \quad (19)$$

$$St : \sum_{i=1}^n \sum_{j=1}^m [RQI_{ij} S_{ij} - RQI_i (1 - S_{ij})] - d_1^- + d_1^+ = RQ^{goal} \quad (20)$$

$$\sum_{i=1}^n \sum_{j=1}^m [S_{ij} (C_{ij} + C'_{ij})] - d_2^- + d_2^+ = C^{goal} \quad (21)$$

$$\sum_{i=1}^n \sum_{j=1}^m [L_i (1 - S_{ij}) - S_{ij} L'_{ij}] - d_3^- + d_3^+ = L^{goal} \quad (22)$$

$$\sum_{i=1}^n \sum_{j=1}^m [(1 - S_{ij}) t_i - t'_{ij} S_{ij}] - d_4^- + d_4^+ = T^{goal} \quad (23)$$

$$RQ^{goal} - (e_1^- + e_1^+) = RQ_{min}^{goal} \quad (24)$$

$$RQ_{min}^{goal} \leq RQ^{goal} \leq RQ_{max}^{goal} \quad (25)$$

$$C^{goal} - (e_2^- + e_2^+) = C_{min}^{goal} \quad (26)$$

$$C_{min}^{goal} \leq C^{goal} \leq C_{max}^{goal} \quad (27)$$

$$L^{goal} - (e_3^- + e_3^+) = L_{min}^{goal} \quad (28)$$

$$L_{min}^{goal} \leq L^{goal} \leq L_{max}^{goal} \quad (29)$$

$$T^{goal} - (e_4^- + e_4^+) = T_{min}^{goal} \quad (30)$$

$$T_{min}^{goal} \leq T^{goal} \leq T_{max}^{goal} \quad (31)$$


The main objective of the problem is to minimize deviation variables of the goals. The constraint (20) shows that the risk quantity index should be minimized and based on constraints (24) and (25) the best mode is achieved when the entire CMS are used. The constraint (21) indicates the required budget for using of CMS and based on constraints (26) and (27) the best mode is when more funding is allocated for the use of CMS. The constraints (22) and (23) show that the lost cost of risk and the deviation from the planned schedule should be minimized, respectively. Based on constraints (28) to (31) this happens when the L^{goal} and T^{goal} are at a minimized mode.

5- Case Study of Construction of LPG Storage Tanks


Phase 13 of the South Pars Gas Field Project includes offshore drilling and facilities (platforms and sub-sea pipelines) and onshore refinery facilities for reservoir fluid processing. The South Pars Gas Field located in The Persian Gulf, 105 km south of Iranian Coast will be developed to produce high quantity reservoir fluid, and transport the fluids to mainland for further treatment. Liquid propane gas is one of the

subsidiary productions of a refinery and it is wrought of propane (C_3H_8) and butane (C_4H_{10}) hydrocarbon. These products can be used in cars as a type of fuel along with other combustible mixtures; hence their production and use are increasing worldwide since they are less polluting. Moreover they can be utilized as consumable products in houses especially in Iran.


Liquid petroleum gas (LPG) storage tank is one of the refinery parts which is a place for storing the propane gas produced and plays the role of propane refrigerator. This project is transferred to a sub-contractor in an EPC contract format. The contract duration was 25 months from the start of the project and the actual progress of the project was 52% after 39 months. Later, the project was extended for another 25 months and also the amount of contract increased due to the new conditions. Now the project status is critical due to new agreements; the total amount price will not be increased under any circumstances. Therefore, proper management is vital in the current condition of the project and RM can be very important in this case. Seventy five risks were identified in top levels by experts and grouped in five phases including management (M), engineering (E), procurement (P), construction (C) and commissioning (COM). In the next step, pair-wise comparisons matrixes (PWCM) were prepared and distributed among experts, then the PWCM scores was gathered. With employing of Fuzzy DEMATEL, the total relation – matrix and casual digraphs of each phase was identified based on Eqs. (2) - (8). The results are shown in Fig.4.

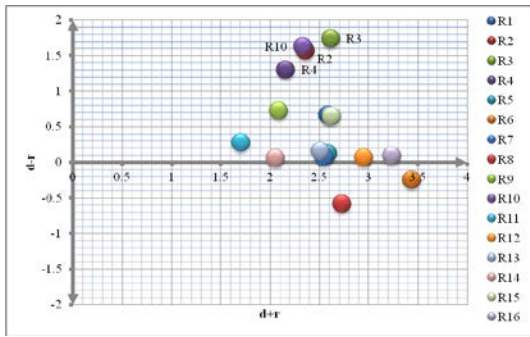


Management phase

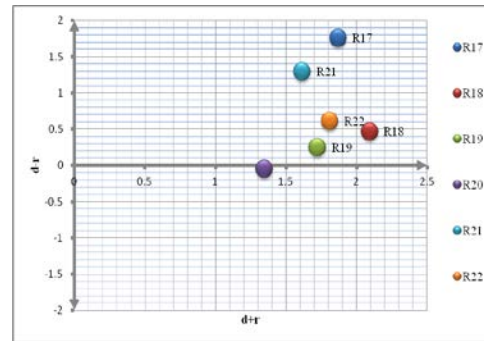


Engineering phase

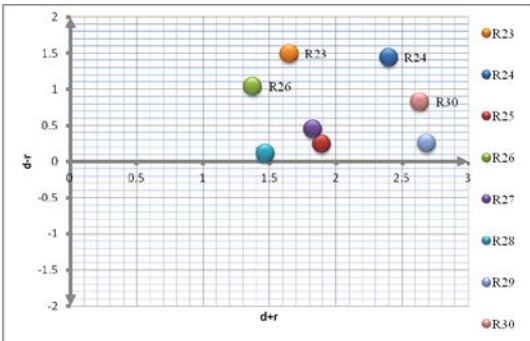


Procurement phase (Bulk material)

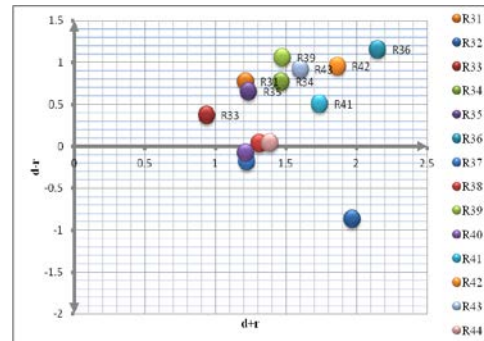

procurement phase (long lead time)

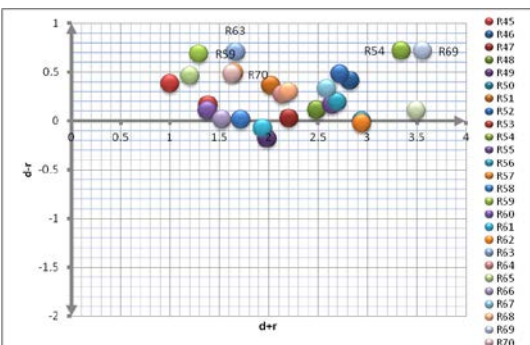

Construction phase

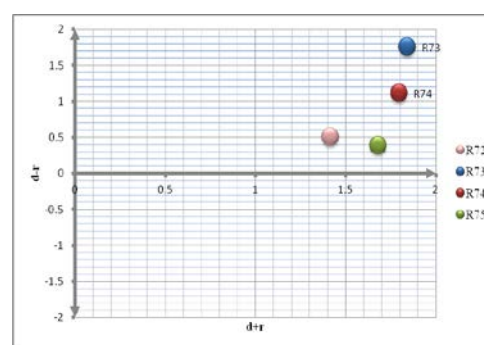

Commissioning phase

Fig.4. Cause and effect diagrams

The critical risks known and prepared for analysis by experts are shown in Table 5. Meanwhile, the fuzzy DEMATEL results including Tables 9 through 13 are illustrated in Appendix A. The occurrence probability of each risk will be determined by decision makers and experts based on Table 3.

Table 3. Guidance to identifying risk occurrence probability

Item no.	threat status	Level
1	This event is preventable	1
2	Usually this event is preventable	2
3	This event might be preventable but maybe excess activity is required	3
4	This event is not preventable but can be handled with other ways	4
5	This event is not preventable and it does not exist any ways	5

The risk impact on the project objectives is classified into five levels which will be determined by decision makers and experts based on Table 4. For example, if a risk does not incorporate the desirable impact on the project objectives, number 1 will be selected.

Table 4. Guidance to identifying risk impact on objectives

Item	Cost impact	Time impact	Quality impact	Level
1	Almost without any increasing	Almost timely	Almost without undesirable impact or very low	1
2	Increasing less than 10%	Delay less than 5% (more resource is required)	Acceptable with low depression around scope	2
3	Increasing between 10% to 20%	Delay between 5% to 10%(it is not able to reach the planned dates)	Acceptable with significant depression around scope	3
4	Increasing between 20% to 30%	Delay between 10% to 20%(impact on critical path)	It is not acceptable by owner	4
5	Increasing more than 40%	Delay more than 20%(it is not compensable and reaching to fundamental milestones)	Incredible and resultant to rework	5

Thus in accordance with Tables 3 and 4, RQI_i and then PRI along with $EAC, EAC_{(t)}$ are calculated for the critical risks based on Eqs. (12)-(14). Now it is possible to get the effect of each risk on the objectives based on its' RQI . In other words, quantities of $\square t_i$ and L_i are calculated in this step, the results of which have been listed in Table 5.

Table 5.Critical risk impacts on objectives

Risk	Risk Description	Phase	$RQI_i = P_i * I_i$		Δt_i	L_i	
1	Inflation and unpredictable sway in prices	M	P_1	3	RQI_1	1.8	24.1
			I_1	2			
2	Force major	M	P_2	1	RQI_2	0.9	12.0
			I_2	3			
3	inaccessibility to engineering consultant to be confirmed by owner	E	P_3	3	RQI_3	1.8	24.1
			I_3	2			
4	Change in internal precept	P	P_4	2	RQI_4	0.6	8.03
			I_4	1			
5	supplying of materials from vendors to be confirmed by owner	P	P_5	2	RQI_5	1.2	16.0
			I_5	2			
6	Transferring of Inefficiency information to vendors	P	P_6	1	RQI_6	0.6	8.03
			I_6	2			
7	Delay in entry of material and equipment to site	C	P_7	3	RQI_7	1.8	24.1
			I_7	2			
8	Lack of resources (material, labor, non-labor)	C	P_8	2	RQI_8	1.2	16.0
			I_8	2			
9	financial Infirmary of subcontractors	C	P_9	2	RQI_9	1.2	16.0
			I_9	2			
10	Incoherence of executed part with designed drawings	Com	P_{10}	2	RQI_{10}	1.2	16.0
			I_{10}	2			

Based on EAC index, the added cost for completion of the project based on PRI is equal to 164.70 units of money and deviation from the planned schedule based on PRI obtained is equal to about 13 months. These quantities show that the project status is critical and the project manager takes the CMs for risks of the project. After determining the impact of critical risks on objectives, the CMs are identified (26 CMs identified by experts) and RQI_{ij} is estimated with proposing all CMs of each risk which has been allocated to it. The identified CMs have been shown in Table 6 allocated to the risks.

Table 6.Control measures allocated to risks.

Decision Variables	Strategy	CMs
S_{17}	Avoidance	Negotiation with client for receiving margin cost
S_{18}		Resource planning
S_{112}		Implementation of project management standards specially RM
S_{113}		Resource increasing
S_{115}		Supplying and stocking before predefined dates
S_{116}	Mitigation	Expediting in supplying
S_{119}		Employing management reserves
S_{122}		Employing groups for analyzing economical indexes
S_{124}		Employing incentive tools for expediting and decreasing cost
S_{125}		Shortening or eliminating of complicated work process
S_{21}	Transfer	Project makes insurance
S_{33}	Avoidance	Conclude a contract as PC
S_{35}		Negotiation with client for employing of other engineering firms
S_{39}		Negotiation with client for employing of consultant firms for reviewing and approval of similar project drawings
S_{312}	Mitigation	Implementation of project management standards specially RM
S_{412}		Implementation of project management standards specially RM
S_{417}		Legal consulting for identifying of administrating process with the lowest incurrence provision
S_{52}	Transfer	Concluding a contract with internal/external suppliers
S_{56}	Avoidance	Negotiation with client for supplying of other suppliers
S_{512}		Implementation of project management standards specially RM
S_{514}		Informal ways in emergency conditions
S_{523}	Mitigation	Employing experience of similar projects
S_{612}		Implementation of project management standards specially RM
S_{620}		Implementation of a document control system
S_{621}		Employing consultant firms
S_{72}	Transfer	Concluding a contract with internal/external suppliers
S_{712}		Implementation of project management standards specially RM
S_{716}		Expediting in supplying
S_{88}	Mitigation	Resource planning

Table 6.continued

Decision Variables	Strategy	CMs
S_{912}		Implementation of project management standards specially RM
S_{913}		Increasing of resources
S_{910}	Mitigation	Negotiating and concluding a contract for financing of project with financiers
S_{912}		Implementation of project management standards specially RM
S_{926}		Expediting payment by owner
S_{104}		Avoidance
S_{1011}		instruction of key personnel
S_{1012}	Mitigation	Implementation of project management standards specially RM
S_{1018}		Quality control improvement
S_{1020}		Implementation of a document control system

Based on AHP technique the weight of each CM with regard to the impact on the objectives (time, cost and quality) is calculated and ranked. Afterwards, the impact of each CM in reducing RQI_i can be determined. EVM indices with considering new PRI are calculated. We can calculate $\Delta t'_{ij}$ and L'_{ij} quantities which are listed in Table 7.

So as mentioned, after identifying CMs and the weights and effects of each CM on reduction of the risk loss and the project completion time, one should estimate the cost requirements for employing the CMs. The results of which have been listed in Table 7.

Table7.Critical risk impact on objectives taking CMs

Risk no.	Risk Description	c_{ij}	c'_{ij}	$RQI_i = P_i * I_i$			$\square t'_{ij}$	L'_{ij}
1	Inflation and unpredictable sway in prices	23,70	0,58	P_1 I_1	2 1	RQI_1 2	0.55	8.68
2	Force major	31,30	0	P_2 I_2	1 2	RQI_2 2	0.55	8.68
3	inaccessibility to engineering consultant that be confirmed by owner	44,20	3	P_3 I_3	2 1	RQI_3 2	0.55	8.68
4	Change in internal precept	0,1	0,01	P_4 I_4	1 1	RQI_4 1	0.27	4.34
5	supplying of materials from vendors that be confirmed by owner	10,03	6,08	P_5 I_5	1 1	RQI_5 1	0.27	4.34
6	Transferring of Inefficiency information to vendors	10,15	0	P_6 I_6	1 1	RQI_6 1	0.27	4.34
7	Delay in entry of material and equipment to site	10,13	0	P_7 I_7	1 1	RQI_7 1	0.27	4.34
8	Lack of resources(material, labor, non labor)	20,10	0	P_8 I_8	1 1	RQI_8 1	0.27	4.34
9	financial Infirmity of subcontractors	33,30	0	P_9 I_9	1 1	RQI_9 1	0.27	4.34
10	Incoherence of executed part with designed drawings	8,32	0	P_{10} I_{10}	1 1	RQI_{10} 1	0.27	4.34

Having solved the goal programming model (19)-(31), the optimal solution was achieved as shown in Table 8. Therefore, any deviation from the goals is calculated easily and decision maker/project manager can view the results based on his/her predefined goals. There were some constraints for employing the CMs based on the organization and project conditions. Moreover, it is not necessary at this time to employ the 14th control measure for the 5th risk.

Table 8.Optimal control measures for responding to risks

Risk no.	Optimal CMs for responding to risk's
1	$S_{17}, S_{18}, S_{112}, S_{115}, S_{116}, S_{119}, S_{122}, S_{124}, S_{125}$
2	S_{212}
3	S_{35}, S_{39}, S_{312}
4	S_{412}, S_{417}
5	S_{56}, S_{512}, S_{523}
6	S_{612}, S_{620}
7	S_{72}, S_{712}, S_{716}
8	S_{88}, S_{812}
9	S_{912}, S_{926}
10	$S_{1011}, S_{1012}, S_{1018}, S_{1020}$

Table 9.Deviations predefined goals

Deviations of goals	%RQIV	%LV	%ΔTV
Quantity (%)	-32	-33.63	-36.81

The results of this study are summarized as follows. According to Table 8, the optimal CMs are discovered for each risk. As shown, the 12th CM is needed to respond to all critical risks which indicate the importance of implementing the project management standards specially RM in the project. The project manager must be aware, that the majority of CMs are strategies for mitigation of risk occurrence probability and risk loss to the project. Hence, the project team must always be ready to react properly in response to the risks.

Improvement of the project objectives is found significant as follows. In total, 65.73% of improvement can be achieved in the project cost based on EVM indices and 72% in the project completion time by using the entire CMs. However the following results are found based on the allocated budget. The improvement in time is equal to 45.49%, while the improvement in reduction of the risk loss is equal to 43.43% and finally the RQI quantity is increased to 46.43%. The proposed methodology is flexible in many types of EPC projects and by changing the risks, contractual objectives and organizational politics, the quantities and optimal CMs will also change. Moreover deviation from the goals has been shown in Table 9. Now the project manager must use all available tools and facilities for implementing the CMs in the risk monitoring stage and compare the results with the proposed model and take any required modifying action.

6- Conclusion and Future Research

Economic development in many countries requires implementation of large-scale projects and currently, the owners normally tend to conclude an EPC contract with the contractors to execute such projects.

Actually the RM process which is one of the areas of project management can lead the project team to its goals. This research describes a methodology for identifying and analyzing the critical risks in a large-scale EPC project. It was a combination of MCDM and Earned value management techniques which is a well-known method for the project managers. By employing and solving a goal programming model, the most optimal responses to the risks were identified. In accordance with the findings of the present case study, in construction of LPG storage tanks, the critical risks may cause undesirable effects in the project objectives. In the EPC projects the least mistake and error can result in irrecoverable results. Hence, all the stakeholders have got to attend to risks during execution of the project and register, control, and update them as long as they do not endanger the project objectives. As a result, with the use of the proposed methodology, it was possible to select optimal solutions to respond to the risks.

References

- Adedokun, O.A., D.R. Ogunsemi, I.O. Aje, O.A. Awodele and D.O Dairo.(2011). Evaluation of qualitative risk analysis techniques in selected large construction companies in Nigeria, *Journal of Facilities Management, Vol.11 No. 2*, pp. 123-135.
- Adedeji B.badiru, olufemi A.omitaomu.(2011),*handbook of industrial engineering equations, formulas and calculations, CRC Press, Taylor & Francis Group, 6000 Broken Sound Parkway NW, Suite 300,Boca Raton, FL 33487-2742.*
- Alam Tabriz Akbar et al.(2013), A Combined Approach of the Earned Value Management and the Risk Management for Estimating Final Results of Projects in Fuzzy Environment
- Aliverdi Reza, Moslemi Naeni Leila, Salehipour Amir.(2013).Monitoring project duration and cost in a construction project by applying statistical quality control charts, *International Journal of Project Management 31*, 411–423.
- Bon-Gang Hwang et al. (2014). Risk management in small construction projects in Singapore: Status, barriers and impact, *International Journal of Project Management 32*, 116–124.
- Car, V., J.H.M.Tah.(2001),A fuzzy approach to construction project risk assessment and analysis: construction project risk management system, *Advances in Engineering Software 32*, pp.847-857.
- Changsoon Park, Suneung Ahn, Sangwon Lee.(2014).A Bayesian decision model based on expected utility and uncertainty risk, *Applied Mathematics and Computation 242*, 643–648.
- Charnes,A., Cooper, WW., Ferguson,R.,(1995),Optimal estimation of executive compensation by linear programming, *Management Science, 1*, 138-151.

Costa Kyle. et al. (2009). Contract Management for International EPC Projects a Major Qualifying Project Report, Submitted to the Faculty of the Worcester polytechnic institute.

Fontela, E.and Gabus, A.(1974),The DEMATEL,Innovative Methods, Research Report : *Structural Analysis of the World Problematique, Battelle Institute, Geneva.*

Ghezavati Vahidreza, Shojaie Amir Abbas, Esfandiari Hossein, Alavi Kamelia.(2013), Identifying, Prioritization and Responding to Quality Risks Using COQ Approach in Construction Industry, *Caspian Journal of Applied Sciences Research*, 2(6), pp. 21-32.

Gwo-Hshiung Tzeng. Jih-Jeng Huang.(2011),*Multiple attribute decision making Methods and applications.*

HL.chan Joseph. et al.(2010),Developing a fuzzy risk assessment model for guaranteed maximum price and target cost contracts in construction, *Journal of Facilities Management*, Vol. 9 No. 1, pp.34-51.

Jun ying liu, Sui pheng low.(2009).Developing an organizational learning-based model for risk management in Chinese construction firms A research agenda, *Disaster Prevention and Management*, Vol. 18 No.2, pp.170-186.

kris, nilson,R.,(2006).Experienced based recommendation on risk allocation for both owners and contactors, *Pegasus.*

Mahamid Ibrahim.(2011).Risk matrix for factors affecting time delay in road construction projects: owners' perspective, Engineering, *Construction and Architectural Management*, Vol. 18 No.6, pp. 609- 617.

Marcelino Sara - Sadaba et al. (2014). Project risk management methodology for small firms, *International Journal of Project Management* 32, 327–340.

Mohebbi Amir Hassan, Bislimi Ngadhujim.(2012).Project Risk Management methodology Development for Engineering, Procurement and Construction Projects, a Case Study in the Oil and Gas Industry, *Faculty of Economic Sciences, Communication and IT Karlstads Universitet, Universitetsgatan, 65188, KARLSTAD SWEDEN.*

Moore David A.(2013).Security Risk Assessment Methodology for the petroleum and petrochemical industries, *Journal of Loss Prevention in the Process Industries* 26, 1685-1689.

Murphy Martina et al.(2011).A methodology for evaluating construction innovation constraint through project stakeholder competencies and FMEA, *Construction Innovation*, Vol. 11 No. 4, pp. 416-440.

Odeyinka Henry, Lowe John, Kaka Ammar.(2012),Regression modeling of risk impacts on construction cost flow forecast, *Journal of Financial Management of Property and Construction*, Vol.17, No.3, pp.203-221.

Ozdaz Ahmet, okmen onder.(2004).Risk analysis in fixed-price design–build construction project, *Building and Environment* 39, pp 229 – 237.

Peixoto Joana, Tereso Anabela.(2014). Gabriela Fernandes, Rui Almeida. Project Risk Management Methodology: A Case Study of an Electric Energy Organization, *Procedia Technology* 16, 1096 – 1105.

Project management body of knowledge. (2013). (*PMBOK®*) *guide-5th edition*.

Rezaie,K., et al. (2007). Using extended Monte Carlo simulation method for the improvement of risk management: Consideration of relationships between uncertainties, *Applied Mathematics and Computation* 190, 1492–1501.

Rodrigues-da-Silva, Luiz Henrique., Crispim, José António.,(2014). The project risk management process, a preliminary study, *Procedia Technology* 16, 943 – 949.

Ruey-Chyn Tsaur.(2011).Decision risk analysis for an interval TOPSIS method, *Applied Mathematics and Computation* 218, 4295–4304.

Sapori E., Sciutto M., Sciutto G.(2014). A quantitative approach to risk management in Critical Infrastructures, *Transportation Research Procedia* 3, 740 – 749.

Samani Babak A., shahbodaghlu Farzad.(2012) , A Fuzzy Systematic Approach to Construction Risk Analysis, *Journal of Risk Analysis and Crisis Response*, Vol. 2, No. 4, 275-284.

Taylan Osman, Bafail Abdallah O., Abdulaal Reda M.S., Kabli Mohammed R..(2014). Construction projects selection and risk assessment by fuzzy AHP and fuzzy TOPSIS methodologies, *Applied Soft Computing* 17, 105–116.

Teymouri Maryam, Ashoori Maryam.(2011).The impact of information technology on risk management , *Procedia Computer Science* 3, 1602–1608.

Vandevoorde Stephan, vanhouke Mario.(2006),A comparison of different project duration forecasting methods using earned value metrics, *International Journal of Project Management* 24, 289–302.

Wei guo. (2004). Development of a framework for preliminary risk analysis in transportation projects ,*civil engineering*.

Xiafengh du, Amory N.Li.(2008) , Monte Carlo simulation and a value-at-risk of concessionary project the case study of the Guangshen Freeway in China, *Management Research News*, Vol. 31 No. 12, pp. 912- 921.

YaoZhang, Zhi-Ping Fan.(2014). An optimization method for selecting project risk response strategies, *International Journal of Project Management* 32, 412–422.

Zadeh, Lotfi, Fuzzy sets.(1965),*Information and Control* 8, 338–353.

Zhang Yanting, Xing Liyun. (2011).Research on Risk Management of Petroleum Operations, *Energy Procedia* 5, 2330–2334.

.